
# Wireless External Antenna for 2.4 GHz Application

Single-Band Antenna with I-PEX Cable Assembly. Pulse Part Number: W1049B

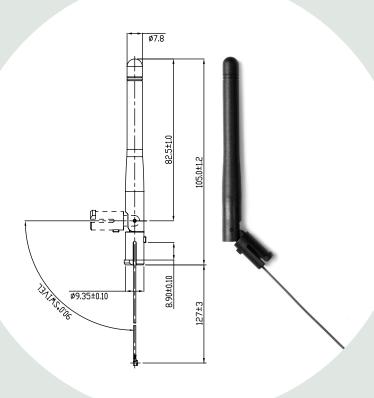

### **Features**

- Shortest antennas in product line Omni-directional radiation
- For WLAN devices using WiFi (802.11b/g), Bluetooth®, ZigBee™ and other applications in the ISM 2.4GHz band
- Omnidirectional radiation pattern provides broad 360° coverage
- One-quarter wavelength dipole configuration
- Various cable length from 3 to 12 inch (76-305mm)

### Connector

- I-PEX

Pansize 20/bag; 500/carton

Dimensions: Inches

Unless otherwise specified, all tolerances are  $\pm \frac{0.10}{0.25}$ 

## Electrical Specifications @ +25 °C

Note: This part number is lead-free and RoHS compliant. No additional suffix or identifier is required.

Part	Frequency	Max Gain	Impedance	Mechanical	Cable Length
Number	[GHz]	[dBi]	[Ω]	Length (in/mm)	(in/mm)
W1049B030	2.4	2.0	50	3.25/82.5	3/76
W1049B050	2.4	2.0	50	3.25/82.5	5/127
W1049B070	2.4	2.0	50	3.25/82.5	7/178
W1049B090	2.4	2.0	50	3.25/82.5	9/229
W1049B120	2.4	2.0	50	3.25/82.5	12/305

Takatie 6

90440 Kempele, Finland Tel: +358 207 935 500 Fax: +358 207 935 501 www.pulseeng.com/antennas



# Wireless External Antenna for 2.4 GHz Application


Single-Band Antenna with I-PEX Cable Assembly. Pulse Part Number: W1049B

## **Application Notes**


Omni-directional antennas provide a uniform, donutshaped, 360° radiation pattern. The omni-directional pattern is suitable for point-to-multipoint broadcasting in all directions. This antenna is primarily used for WLAN applications. However, it can also be used for a variety of other applications withing the spec ified frequency range. When used as an access point, the antenna is ideally located at the center of the coverage area.

### Gain Performance W1049B030



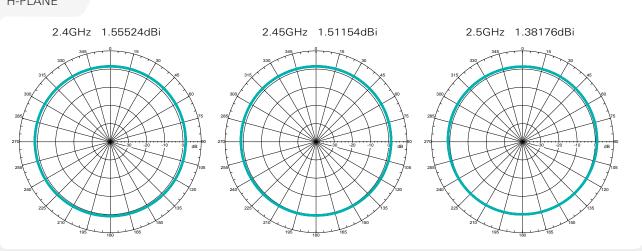



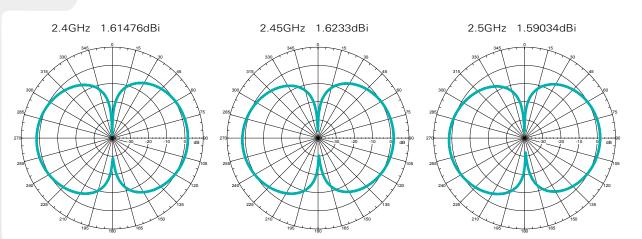

Takatie 6 90440 Kempele, Finland

Tel: +358 207 935 500 Fax: +358 207 935 501 www.pulseeng.com/antennas

